
Product Environmental Profile

Canalis KBA 25A-40A








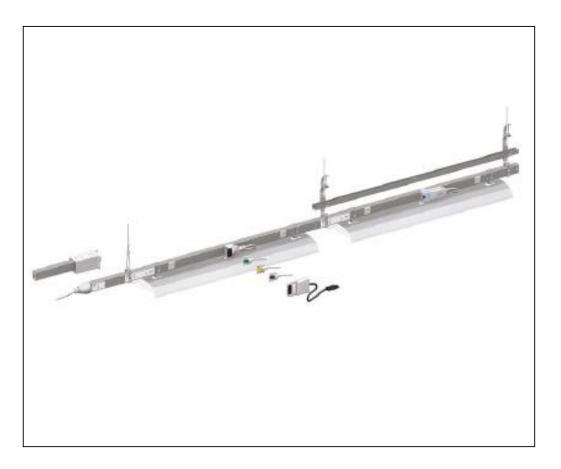



Representative product	The product used for the analysis is the typical product, KBA 25 A, which consists of: 1 x 25 A power feed box (cat. no. KBA25ABG4) 7 x 3 m straight lengths, 1 m modules for tap-off units (cat. no. KBA25ED4303) 7 connectors (cat. no. KBC10DCB20) 22 fixing devices (cat. no. KBA40ZFU)
Description of the product	The Canalis KBA product distributes electrical power for lighting (with luminaries support brackets) and is a full and compatible product for lighting systems in small and medium-height buildings (garages, workshop, and supermarket). It's compatible with Canalis KBL lights, pre-mounted and pre-cabled in the factory). The data used to make this PEP are the most representative of the product studied.
Functional unit	To distribute electrical power for lighting throughout the product system, as outlined by the Representative Product above, for 20 years with the following technical characteristics: • Protection index: IP55 • Regulations: compliant with IEC 60439-2. • Rated service current: 25 A • Rated tap off units current: 10 and 16A • Rated insulating voltage: 690V

Constituent materials

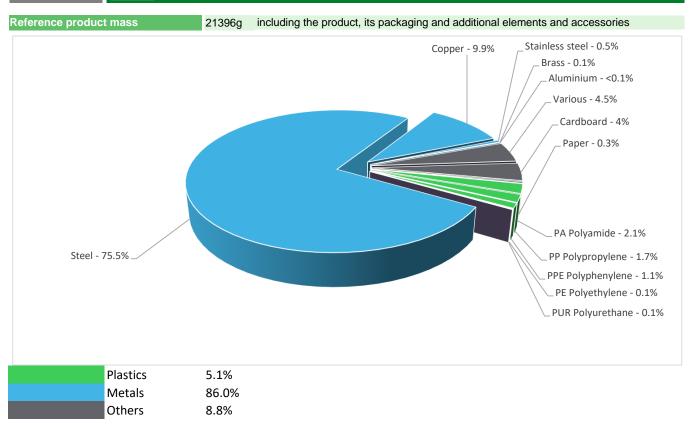

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate – BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page

(19) Additional environmental information

The Canalis KBA 25A-40A presents the following relevent environmental aspects						
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified					
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 917 g, consisting of cardboard (91%), paper (7%), polyethylene (2%) Packaging recycled materials is 88% of total packaging mass. Product distribution optimised by setting up local distribution centres					
Installation	No special components included during installation operations.					
Use	The product does not require special maintenance operations.					
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.					
	Based on "ECO'DEEE recyclability and recoverability calculation method" Recyclability potential: 83% (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).					

T Environmental impacts

Reference life time	20 years					
Product category	Other equipments - Passive product - continuous operation					
Installation elements	The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).					
Use scenario	Load rate / rated current (In): 30% of 25 Amps percentage of utilization time: 100% Assumed service lifetime is 20 years and use scenario is : product dissipation is 19,62W, loading rate is 30%.					
Geographical representativeness	Europe					
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product.					
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: Dijon, France	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU- 27	AC; consumption mix,		

Compulsory indicators Canalis KBA 25A-40A - Canalis KBA - KBA25ABG4							
npact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of L
Contribution to mineral resources depletion	kg Sb eq	3.79E-03	3.64E-03	0*	0*	1.46E-04	0*
Contribution to the soil and water acidification	kg SO ₂ eq	7.28E+00	2.32E-01	1.26E-02	0*	7.03E+00	5.92E-0
contribution to water eutrophication	kg PO ₄ ³⁻ eq	4.81E-01	5.29E-02	2.90E-03	5.03E-05	4.24E-01	1.45E-0
contribution to global warming	kg CO ₂ eq	1.77E+03	8.56E+01	2.76E+00	0*	1.68E+03	2.18E+0
Contribution to ozone layer depletion	kg CFC11 eq	1.12E-04	2.40E-06	0*	0*	1.10E-04	1.26E-0
Contribution to photochemical oxidation	kg C₂H₄ eq	4.15E-01	2.79E-02	8.99E-04	0*	3.86E-01	6.36E-0
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of L
let use of freshwater	m3	6.11E+03	3.86E+00	0*	0*	6.11E+03	0*
otal Primary Energy	MJ	3.73E+04	3.57E+03	3.90E+01	0*	3.36E+04	2.96E+0
100%							
Contribution to Contribution to Contribution to Contribution to Contribution to Contribution water wat resources acidification eutroph depletion	er globa	ibution to (I warming		ontribution to hotochemical oxidation	Net use of freshwater		,

■ Manufacturing	g ■Distrib	oution Insta	allation Use	■End of life			
Optional indicators Canalis KBA 25A-40A - Canalis KBA - KBA25ABG4							
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2.00E+04	8.24E+02	3.88E+01	0*	1.91E+04	2.38E+01
Contribution to air pollution	m³	9.19E+04	1.91E+04	1.17E+02	0*	7.25E+04	2.10E+02
Contribution to water pollution	m³	7.62E+04	6.01E+03	4.54E+02	0*	6.95E+04	2.31E+02
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	6.63E+00	6.63E+00	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	4.30E+03	2.36E+01	0*	0*	4.28E+03	0*
Total use of non-renewable primary energy resources	MJ	3.30E+04	3.54E+03	3.90E+01	0*	2.94E+04	2.96E+01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	4.28E+03	6.71E+00	0*	0*	4.28E+03	0*
Use of renewable primary energy resources used as raw material	MJ	1.69E+01	1.69E+01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	3.29E+04	3.46E+03	3.90E+01	0*	2.94E+04	2.96E+01
Use of non renewable primary energy resources used as raw material	MJ	8.52E+01	8.52E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	2.83E+02	2.58E+02	0*	0*	8.78E-01	2.39E+01
Non hazardous waste disposed	kg	6.31E+03	3.47E+01	0*	0*	6.28E+03	0*
Radioactive waste disposed	kg	4.20E+00	9.23E-03	0*	0*	4.19E+00	0*

Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1.99E+01	2.07E+00	0*	9.12E-01	0*	1.70E+01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	9.21E-02	0*	0*	0*	0*	9.21E-02
Exported Energy	MJ	2.90E-03	2.73E-04	0*	2.63E-03	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2018-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00553-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH25	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Date of issue 06/2020		Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years

Independent verification of the declaration and data, in compliance with ISO 14025 : 2010

Internal External X

The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)

PEP are compliant with XP C08-100-1 :2016

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14025: 2010 « Environmental labels and declarations. Type III environmental declarations »



Schneider Electric Industries SAS

ROSELYNE THAI

roselyne.thai@schneider-electric.com

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com Published by Schneider Electric

SCHN-00553-V01.01-EN © 2019 - Schneider Electric – All rights reserved

06/2020