
# **Product End of Life Instructions**

### LATCH BLK LC1 D09-D65A 42V





#### ▲ Potential disassembly risks

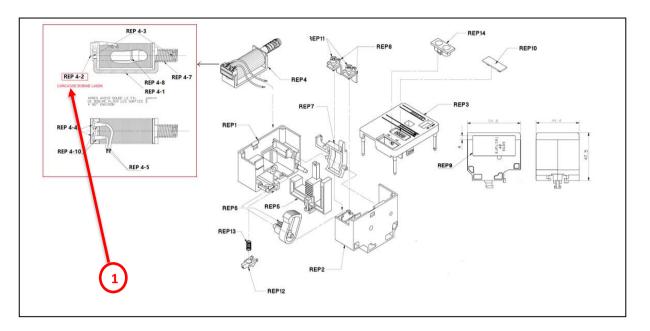

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be dismantled	1	PBT GF20 FR (17)	1.5	

## Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The LAD6K10E is mounted on the front face of the contactor. When the contactor coil is switched on, the mobile holder drives the mechanical device of the LAD6K10E which locks the contactor in the closed position, after switching off the power of the contactor coil. The unlocking of the LAD6K10E is done manually or by remote control
Product reference	LAD6K10E
Additional similar product references	LAD6K10E,LAD6K10B,LAD6K10BSV,LAD6K10C,LAD6K10E,LAD6K10EN,LAD6K10F,LAD6K10J,L AD6K10K,LAD6K10L,LAD6K10M,LAD6K10Q,LAD6K10U
Total representative product mass	88 g
Representative product dimensions	54.8 x 44.4x 47.5
Accessories	No
Date of information release	11/2020

#### **Additional information**

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.		
In case of special transportation: transportation method	No		
Recyclability potential	39%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).	

Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier CS 30323 F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI2011001\_V1

Published by Schneider Electric © 2019 - Schneider Electric – All rights reserved

11/2020