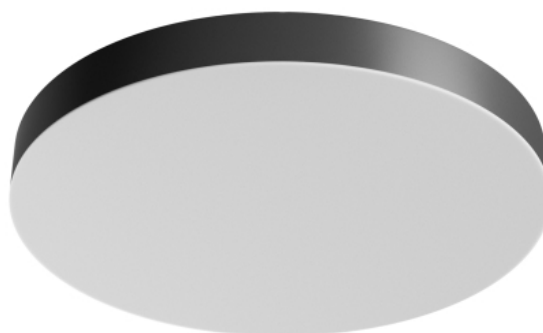


# NYMPHEA OPTIMA BLACK CCT

SLI031050CCT\_PW

Plafond NYMPHEA OPTIMA BLACK CCT with the possibility of changing the light color (CCT), with a power of 36 W, high light efficacy 120 lm/W. Thanks to the ability to change the color temperature (CCT) in the range 3000 / 4000 / 6000K, we can adjust the light color depending on our needs and preferences. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.

**CCT**

|                           |                       |                    |                             |
|---------------------------|-----------------------|--------------------|-----------------------------|
| Power                     | <b>36 W</b>           | Voltage            | <b>230 V</b>                |
| Luminous flux*            | <b>4300 lm (360°)</b> | Colour temperature | <b>3000 / 4000 / 6000 K</b> |
| Colour of light           | <b>CCT</b>            | Beam angle         | <b>120 °</b>                |
| Degree of protection (IP) | <b>IP20</b>           |                    |                             |

## Technical data


|                              |  |
|------------------------------|--|
| Code                         | SLI031050CCT_PW  |
| Power                        | 36 W   |
| Nominal current              | 165 mA   |
| Voltage                      | 230 V  |
| Energy consumption           | 36 kWh/1000h   |
| Frequency                    | 50HZ Hz  |
| Protection class             | II   |
| Power supply included        | +  |
| Power factor                 | 0.95   |
| Useful luminous flux*        | 4300 lm (360°)   |
| Luminous flux**              | 3240 lm (360°)   |
| Lamp efficacy                | 120 lm/W   |
| Colour temperature           | 3000 / 4000 / 6000 K                                   |
| Colour of light              | CCT  |
| Beam angle                   | 120 °  |
| RA                           | 80   |
| Light source included        | +  |
| Uniformity of color SDCM max | 5  |
| Dimmable                     | No   |
| Working temperature range    | -20 / +40 °  |
| Lifespan                     | 17000 h  |
| Housing material             | Plastic  |
| Degree of protection (IP)    | IP20   |
| Colour                       | White  |
| Dimension (AxBxC)            | 400x50 mm  |
| For use                      | Inside   |
| Application                  | Inside   |
| Made in                      | PRC  |
| Other                        | Light color change function<br>3000K / 4000K / 6000K , |

## Logistics data


|                       |         |
|-----------------------|---------|
| Bulk packaging        | 10 pcs. |
| Gross weight (1 pcs.) | 1.05 kg |

## Related documents



 User manual



 Declaration of Conformity

