# GOLD METAL

## IP40 SURFACE DISTRIBUTION BOXES WITH METAL DOOR

Description: IP40 SURFACE 4x14 MOD. PE+N

Reference:
**GMS56PO/RR**

## Characteristics:

| | |
|---|---|
| **Product type:** | IP40 Surface distribution box 14 módulos with screwed neutral and earth bar |
| **Exterior dimensions (Height x Width x Depth):** | 755x390x122 mm |
| **Dimensions of the flush-fit gap (HxWxD):** | |
| **Number of modules:** | 4x14 (56) DIN rail |
| **Installation:** | Surface |
| **Color:** | Door, front cover: RAL 9003. Frames: RAL 7035. |
| **Window:** | Metal |
| **Weight (kg):** | 5,9 |
| **Cable entry:** | Post.: 245x50 mm with 5x5 mm premarks |
| **Components:** | |
| **Materials:** | Front cover: white PS. Frame: gray PS. Halogen-free plastic materials. |
| **Lid-window-door material:** | |

## Technical data:

| | |
|---|---|
| **Degree of protection:** | IP40 |
| **Resistance to impact:** | IK08 |
| **Glow wire resistance:** | 650 ºC |
| **Ball pressure test:** | |
| **Ambient temperature range:** | -25 ºC / +40 ºC |
| **Maximum material temperature:** | |
| **Maximum operating voltage:** | 1000 V AC / 1500 V DC |
| **Rated current:** | |
| **Double insulation:** | Class I |

## Certificates and standards:

| | |
|---|---|
| **Directive:** | 2014/35/EU |
| **Standards:** | EN-IEC 60670-1-24 |
| **Certificates:** | |

CE

## Codes:


| | |
|---|---|
| **EAN:** | 8431044213170 |
| **Customs tariff number:** | 85.38.10.00 |
| **ETIM 8.0:** | EC000214 |

# GOLD METAL

## IP40 SURFACE DISTRIBUTION BOXES WITH METAL DOOR

Description: IP40 SURFACE 4x14 MOD. PE+N

**Reference:** GMS56PO/RR

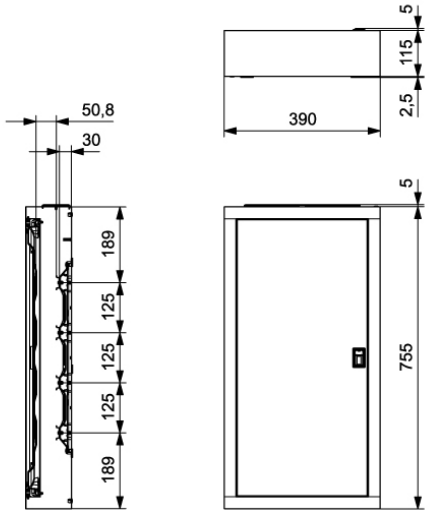




**Detailed drawing:**

https://www.ide.es/downloads/planos/pdf/GMS56PORR.pdf

https://www.ide.es/downloads/planos/dxf/GMS56PORR.dxf

https://www.ide.es/downloads/planos/stp/GMS56PORR.stp

**Exterior dimensions (Height x Width x Depth):**

755x390x122 mm

**Dimensions of the flush-fit gap (Height x Width x Depth):**

## Sustainability:

RoHS - REACH

## Supply:

Supplied in individual cardboard packaging. When several items are sent together, they are bundled together with transparent film. They are supplied with all the elements assembled except the elements supplied in the accessory bag.

**Packaging units:**

## Product end of life:

It does not require specific recycling operations.

## Recommended applications:

Tertiary and residential sectors. For use indoors, designed for surface installation. Flats, houses, offices, hotels, etc.