

Product Environmental Profile

Sensor for infrared motion detection RP-C-EXT-MS-BLE






General information

Representative product	Sensor for infrared motion detection RP-C-EXT-MS-BLE - SXWREMSBLE10001
Description of the product	The RP-C-EXT-MS-BLE multi-sensor is used for infrared motion detection, the measurement of two luminosity levels in two independent zones, and the emission and receipt of Bluetooth Low Energy (BLE) signals from mobile devices.
Functional unit	The multi-sensor is a Bluetooth Low Energy beacon application during 10 years using 12.5mA @ 24VDC and a 100% use rate. This sensor is a peripheral of a controller used to set lighting, blinds, HVAC. The sensor is not a controller.



Constituent materials

Reference product mass 133 g including the product, its packaging and additional elements and accessories

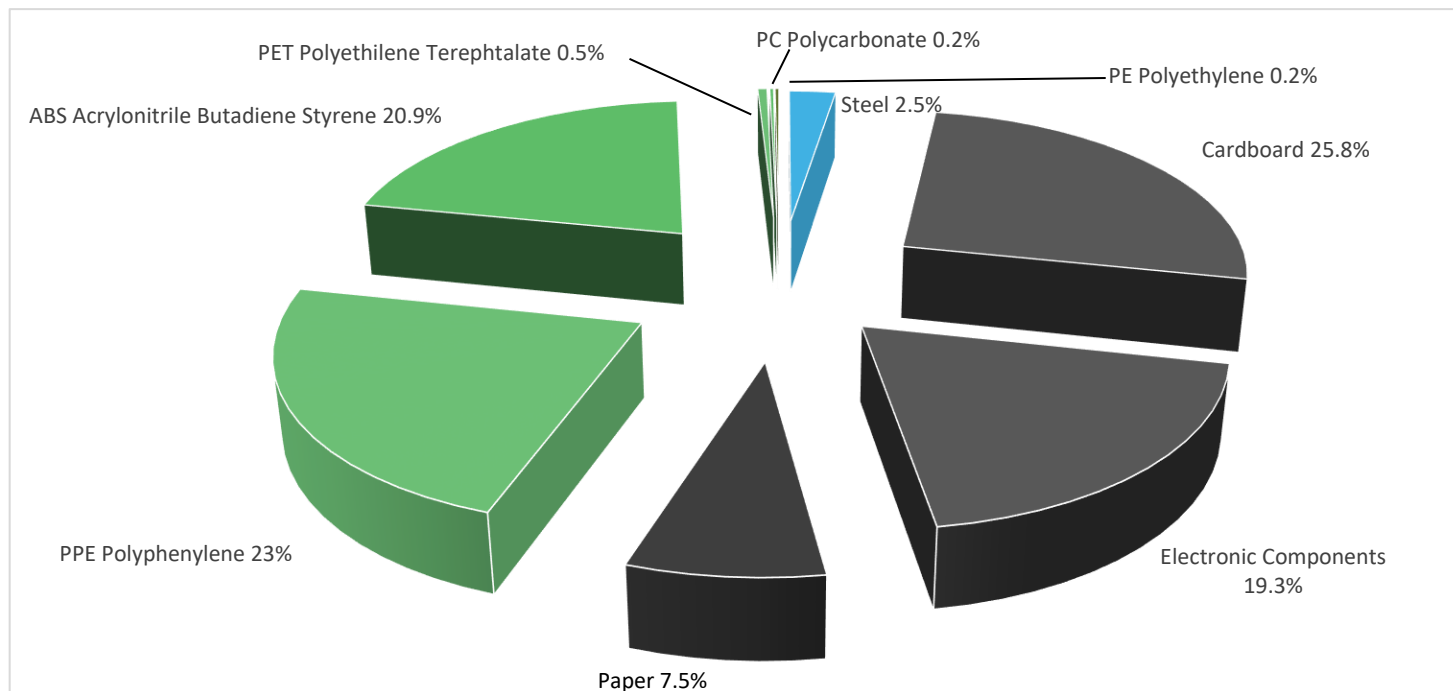

Plastics	44.8%
Metals	2.5%
Others	52.6%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The Sensor for infrared motion detection RP-C-EXT-MS-BLE presents the following relevant environmental aspects


Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 46 g, consisting of cardboard (75%), paper (25%) Packaging recycled materials is 60% of total packaging mass. Product distribution optimised by setting up local distribution centres
Installation	SXWREMSBLE10001 does not require any installation operations.
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains electronic cards (27g) that should be separated from the stream of waste so as to optimize end-of-life treatment. The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page Recyclability potential: 75% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



Environmental impacts

Reference life time	10 years			
Product category	Other equipments - Active product			
Installation elements	The transport of packaging for disposal, and the disposal are accounted for in the installation phase.			
Use scenario	PSR0005, sec. 3.13 Other Equipment, Active Products Category 2 - 100% active mode, .3W over 10 years			
Geographical representativeness	France			
Technological representativeness	The RP-C-EXT-MS-BLE multi-sensor is used for infrared motion detection, the measurement of two luminosity levels in two independent zones, and the emission and receipt of Bluetooth Low Energy (BLE) signals from mobile devices.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: France	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27, US, CN	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		Sensor for infrared motion detection RP-C-EXT-MS-BLE - SXWREMSBLE10001					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2.26E-04	2.25E-04	0*	0*	9.25E-07	0*
Contribution to the soil and water acidification	kg SO ₂ eq	5.13E-02	3.54E-03	7.84E-05	1.04E-05	4.76E-02	4.03E-05
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	4.65E-03	7.88E-04	1.80E-05	2.52E-06	3.82E-03	1.84E-05
Contribution to global warming	kg CO ₂ eq	1.70E+01	2.08E+00	1.72E-02	2.49E-03	1.48E+01	5.50E-02
Contribution to ozone layer depletion	kg CFC11 eq	9.55E-07	2.27E-07	0*	0*	7.25E-07	1.86E-09
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	3.50E-03	5.05E-04	5.59E-06	7.75E-07	2.98E-03	3.50E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m ³	3.74E+01	4.81E-02	0*	0*	3.74E+01	0*
Total Primary Energy	MJ	3.04E+02	2.97E+01	2.43E-01	3.25E-02	2.74E+02	1.75E-01

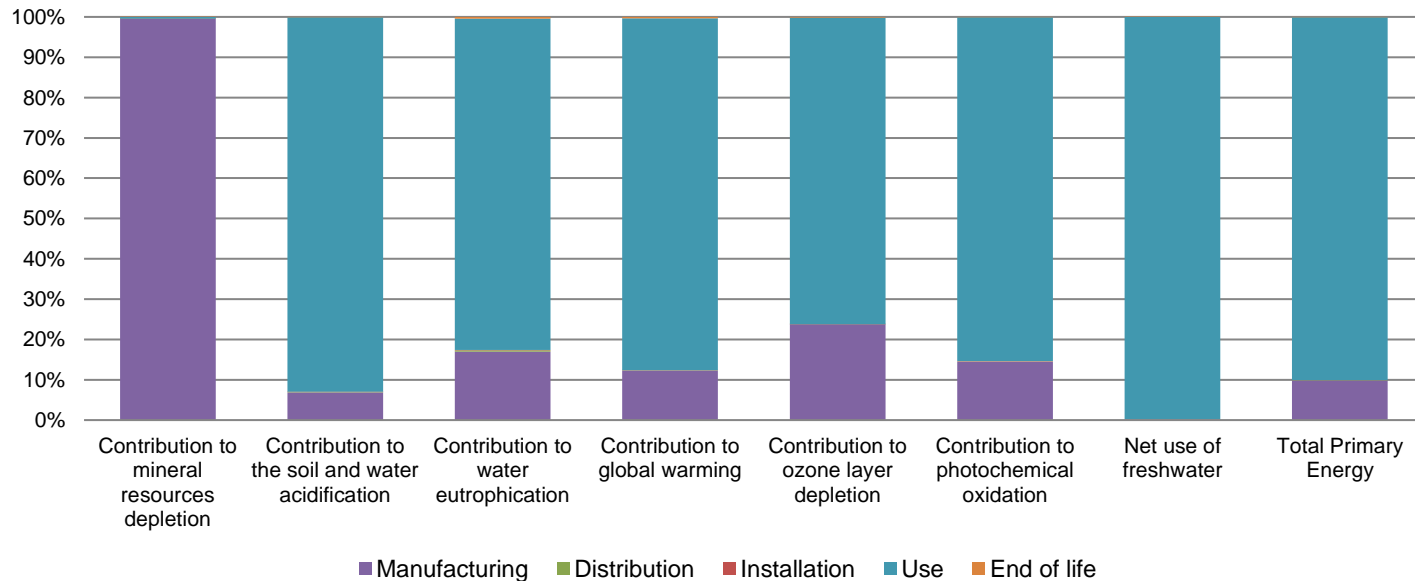

Optional indicators		Sensor for infrared motion detection RP-C-EXT-MS-BLE - SXWREMSBLE10001					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2.01E+02	2.14E+01	2.41E-01	3.22E-02	1.79E+02	1.43E-01
Contribution to air pollution	m³	1.08E+03	1.99E+02	7.30E-01	0*	8.75E+02	1.28E+00
Contribution to water pollution	m³	8.91E+02	2.38E+02	2.82E+00	3.77E-01	6.48E+02	2.50E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	4.57E-04	4.57E-04	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	3.08E+01	9.30E-01	0*	0*	2.99E+01	0*
Total use of non-renewable primary energy resources	MJ	2.73E+02	2.88E+01	2.42E-01	3.24E-02	2.44E+02	1.75E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2.99E+01	4.69E-02	0*	0*	2.99E+01	0*
Use of renewable primary energy resources used as raw material	MJ	8.83E-01	8.83E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.71E+02	2.60E+01	2.42E-01	3.24E-02	2.44E+02	1.75E-01
Use of non renewable primary energy resources used as raw material	MJ	2.79E+00	2.79E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.15E+00	8.10E-01	0*	0*	1.40E-01	2.02E-01
Non hazardous waste disposed	kg	4.07E+01	1.53E+00	0*	0*	3.92E+01	0*
Radioactive waste disposed	kg	2.61E-02	4.31E-04	0*	0*	2.57E-02	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	6.56E-02	1.12E-02	0*	4.57E-02	0*	8.73E-03
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1.44E-02	0*	0*	0*	0*	1.44E-02
Exported Energy	MJ	1.45E-04	1.37E-05	0*	1.32E-04	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00452-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH33	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Date of issue	09/2019	Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	External X		
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)			
PEP are compliant with XP C08-100-1 :2014			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			



Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com

SCHN-00452-V01.01-EN

Published by Schneider Electric

© 2017 - Schneider Electric – All rights reserved

09/2019