


Product Environmental Profile

Carrier for Lexium MC12 system



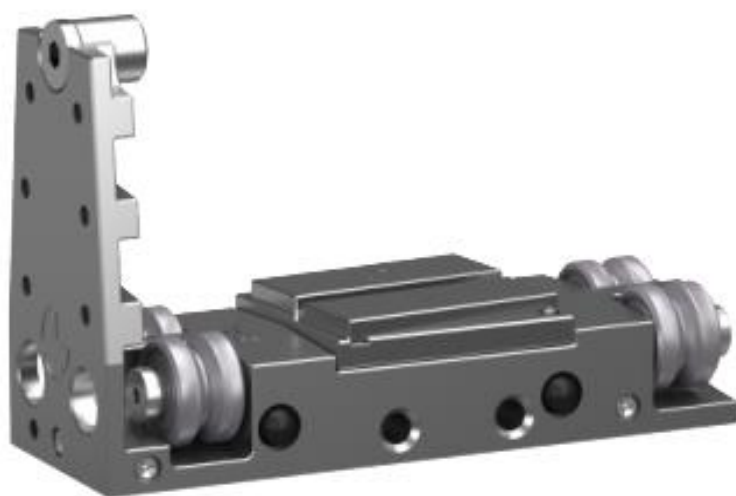

General information

Representative product

Carrier for Lexium MC12 system - LXMMC12CA51S100

Description of the range

Lexium MC12 multi carrier is an innovative transport system to be used in machines. It uses latest linear motion technology to move products individually through the machine. These individual movements allow for new machine designs making machines faster, more flexible and space efficient.

This range consists of LXMMC12CA carriers for Lexium MC12 multi carrier transport system equipped with LXMMCRES*A and LXMMCRA*A guide rails. Included as well is the LXMMCCT0A carrier handling tool.

The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.

Functional unit


To generate propulsive force combined with the coil of the long stator motor segment, during 20 years and a 100% use rate.



Constituent materials

Reference product mass

1040 g including the product, its packaging and additional elements and accessories

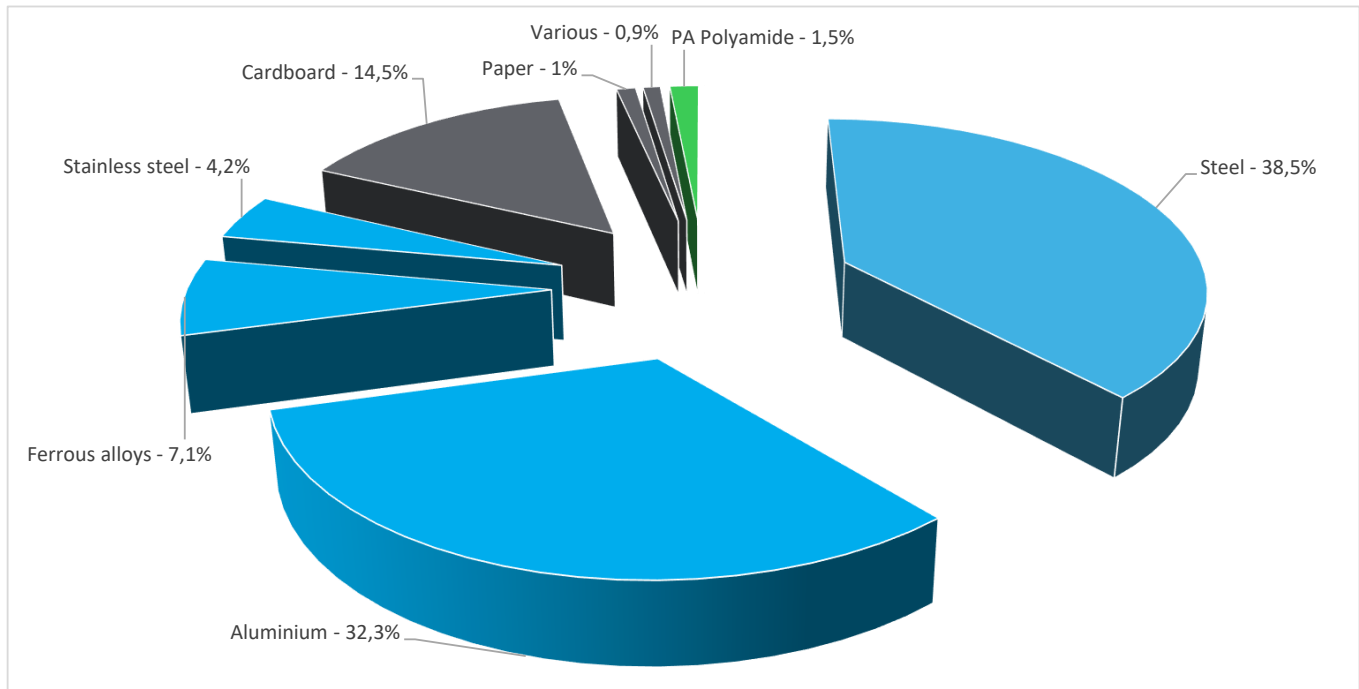

	Plastics	1,5%
	Metals	82,1%
	Others	16,4%

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

Additional environmental information


The Carrier for Lexium MC12 system presents the following relevant environmental aspects

Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 160 g, consisting of cardboard (93%) and paper (7%) Product distribution optimised by setting up local distribution centres
Installation	Does not require any specific installation
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. Recyclability potential: 87% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Environmental impacts

Reference life time	20 years			
Product category	Other equipments - Passive product - continuous operation			
Installation elements	No special components needed			
Use scenario	Passive product			
Geographical representativeness	Europe			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: Germany	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		Carrier for Lexium MC12 system - LXMMC12CA51S100					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	4,79E-05	4,79E-05	5,37E-09	0*	0*	0*
Contribution to the soil and water acidification	kg SO ₂ eq	2,02E-02	1,93E-02	6,13E-04	3,61E-05	0*	2,53E-04
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	2,06E-03	1,85E-03	1,41E-04	8,77E-06	0*	6,02E-05
Contribution to global warming	kg CO ₂ eq	5,01E+00	4,78E+00	1,34E-01	8,66E-03	0*	8,55E-02
Contribution to ozone layer depletion	kg CFC11 eq	6,19E-07	6,13E-07	2,72E-10	0*	0*	5,34E-09
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	1,80E-03	1,72E-03	4,37E-05	2,70E-06	0*	2,73E-05
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	4,19E-01	4,19E-01	0*	0*	0*	1,01E-04
Total Primary Energy	MJ	1,02E+02	9,82E+01	1,90E+00	1,13E-01	0*	1,27E+00

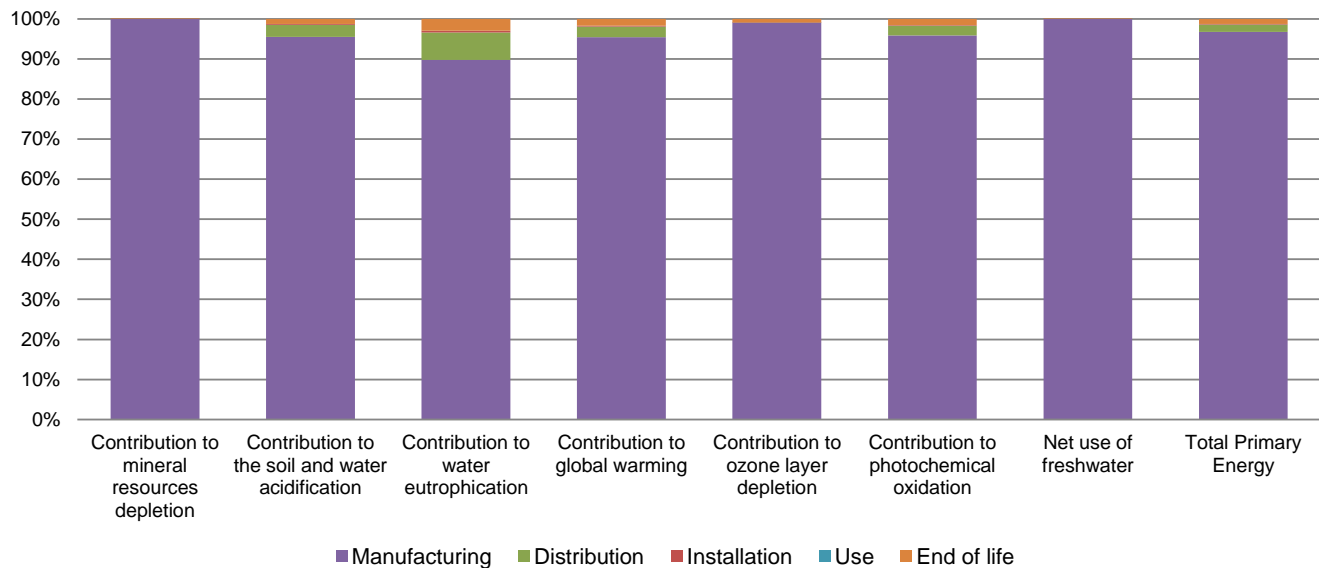

Optional indicators		Carrier for Lexium MC12 system - LXMMC12CA51S100					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	4,90E+01	4,60E+01	1,89E+00	1,12E-01	0*	1,02E+00
Contribution to air pollution	m³	6,39E+02	6,23E+02	5,71E+00	3,45E-01	0*	8,99E+00
Contribution to water pollution	m³	3,25E+02	2,92E+02	2,21E+01	1,31E+00	0*	9,69E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	3,54E-01	3,54E-01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	5,65E+00	5,65E+00	2,53E-03	0*	0*	1,42E-03
Total use of non-renewable primary energy resources	MJ	9,58E+01	9,26E+01	1,90E+00	1,13E-01	0*	1,27E+00
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2,67E+00	2,67E+00	2,53E-03	0*	0*	1,42E-03
Use of renewable primary energy resources used as raw material	MJ	2,98E+00	2,98E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	9,49E+01	9,16E+01	1,90E+00	1,13E-01	0*	1,27E+00
Use of non renewable primary energy resources used as raw material	MJ	9,96E-01	9,96E-01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*

Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	4,42E+00	3,43E+00	0*	0*	0*	9,92E-01
Non hazardous waste disposed	kg	6,12E+00	6,11E+00	4,77E-03	1,18E-03	0*	3,92E-03
Radioactive waste disposed	kg	4,36E-03	4,35E-03	3,40E-06	0*	0*	6,04E-06
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1,03E+00	1,03E-01	0*	1,59E-01	0*	7,64E-01
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1,25E-03	0*	0*	0*	0*	1,25E-03
Exported Energy	MJ	5,06E-04	4,75E-05	0*	4,58E-04	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range.

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP2110016_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	01/2022		
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org
Independent verification of the declaration and data			
Internal	X	External	
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »			

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com

ENVPEP2110016_V1

Published by Schneider Electric

© 2021 - Schneider Electric – All rights reserved

01/2022