


# PCE data sheet

article#	<b>443-9fe</b>
article description	<b>CEE-flanged socket sloping (114x114) 125A 3p 9h IP67 POWER TWIST</b>
description long	CEE-flanged socket sloping (114x114) 125A 3p 9h IP67 POWER TWIST housing material: PA6 rated current: 125A number of poles: 3 (2P+PE) clock-position: 9h rated voltage/frequency: 380-415V~ / 50+60Hz contacts: brass, with lamellar spring (CuBe) connection technology: frame terminals with screws dimensions (flange/fixing center): 114x114 mm / 90x90 mm IP protection class: IP66/IP67
GTIN (EAN)	9003399784866
country of origin	AT
customs number	85366990
net weight	0.792 kg
packaging quantity	2

ETIM 7.0	EC001317
IEC-amperage	125 A
Voltage acc. EN 60309-2	380-415 V (50+60 Hz) red
Number of poles	3
Clock hour position	9 h
Identification colour	Red
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface finish contacts	Untreated
Flange size vertical	114 mm
Drill hole distance vertical	90 mm
Flange size horizontal	114 mm
Drill hole distance horizontal	90 mm

wire flexible	16-50 mm <sup>2</sup>
wire solid	16-70 mm <sup>2</sup>
contact screws	450 Ncm
dismantling length	100 mm
stripping length	24-27 mm

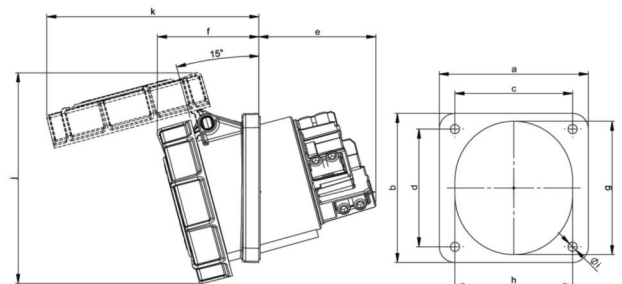

[www.manufacturer-safety.info](http://www.manufacturer-safety.info)