



## Niloé™ STEP

### Keystone adapter, Systimax adaptor

Cat. Nos: 8 631 87B - 8 633 87B - 8 634 87B - 8 635 87B -  
8 635 88B



8 63X 87B



8 63X 88B

#### 1. USE

Keystone mechanism adaptation.


Supplied with protection cover.

Screw or claw fixing.

#### 2. RANGE

Designation	White	Aluminium	Medium Grey	Black
Keystone adapter	8 631 87B	8 633 87B	8 634 87B	8 635 87B
Systimax adaptor	-	-	-	8 635 88B

#### 3. DIMENSIONS (mm)

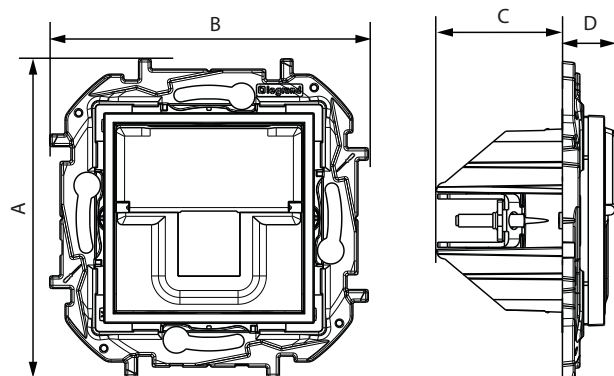

References	A	B	C	D
8 63X 87B	75.8	75.8	30	12.5
8 63X 88B	75.8	75.8	30	13

#### 5. TECHNICAL CHARACTERISTICS

##### ■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 44

Protection against impacts: IK 04

##### ■ 5.2 Material characteristics

Polygloss appearance

Material: - Cover plates: PC

- Halogen free

Material of the support: - PC grey RAL 7016 + 10 % glass fiber  
- Halogen free

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place

+ 650° C / 30 s for other parts made of insulating materials

##### ■ 5.4 Climatic characteristics

Storage temperature: -10°C to +70°C

Usage temperature: -5°C to +40°C

#### 6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Resistance to the cleaning agents: Hexane, Methylated spirit, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning substances, Pre-impregnated wipes.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

#### 7. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (Cat. Nos: 8 631 87 - 8 633 87B - 8 634 87B - 8 635 87B - 8 635 88B) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: [www.legrand.com/ecatalogue](http://www.legrand.com/ecatalogue)