


# Céliane™

## 6 A push-button

Cat. No(s): CM0032




### 1. USE

Lighting control mechanism.  
 To be equipped with support frame, cover plate and finishing plate.

### 2. RANGE

Description	Cat. No
Push-button - NO contact 1-gang	CM0032

### 3. DIMENSIONS (mm)

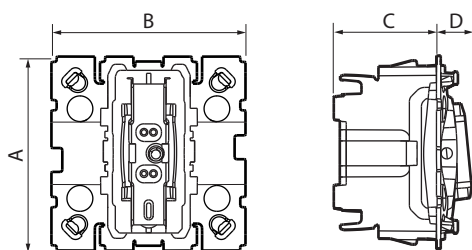

A	B	C	D
45	45	24	8

### 4. CONNECTION

Type of terminals: automatic  
 Terminal capacity: 2 x 2.5 mm<sup>2</sup>  
 Stripping length: 12 mm

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Impact tests: IK 04  
 Penetration by solid bodies and liquids: IP 20

#### ■ 5.2 Material characteristics

Mechanism: PC  
 Colour: grey  
 Halogen-free  
 Self-extinguishing:  
 850°C/30 s for insulating components holding live parts in place  
 650°C/30 s for other insulating components

#### ■ 5.3 Electrical characteristics

Voltage: 250 V~  
 Current: 6 A

#### ■ 5.4 Climate characteristics

Storage temperature: -10°C to +70°C  
 Operating temperature: -5°C to +35°C

### 6. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.  
 See e-catalogue.