


22260053	<b>DATA SHEET</b>	
Valid from: 29.11.2023	<b>AB-C3-M8MA-(L*)PUR</b>	

## Product description

- Sensor/actuator cable, 3-pol, PUR halogen-free, black
- Angled M8-plug on free conductor end



## General characteristics

Number of pins	3
Ambient temperature	-25 °C to +90 °C (-13°F to 194°F) (plug /jack) -40 °C to +80 °C (-40°F to 176°F) (cable, fixed installation) -25 °C to +80 °C (-13°F to 176°F) (cable, movable installation)
Degree of protection	IP 65 / IP 67 / IP 68
Coding	A-standard
Tightening torque	0,2 Nm (M8-connector)
Plugging cycles	≥ 100

## Variation

Article number	Description	Length [m]	Configuration
22260053	AB-C3-M8MA-2,0PUR	2	angled
22260987	AB-C3-M8MA-5,0PUR	5	angled
22260055	AB-C3-M8MA-10,0PUR	10	angled

## Additional note

Data sheet also valid for variant lengths. Other lengths on request.

## Electrical properties

Rated voltage	60 V DC / 48 V AC
Rated current	4 A
Overvoltage category	II
Pollution degree	3

## Mechanical properties


### Plug

Inflammability class in accordance with UL 94	HB
Contact, material	CuSn
Contact carrier, material	TPU GF
Contact surface, material	Ni/Au
Knurl, material	Zinc diecasting, nickel-plated
Handle, material	TPU, flame retardant, self-extinguishing
Sealing, material	NBR

### Line

Cable construction	3 x AWG24/32
Signal line, construction	32 x 0,1 mm
Conductor cross-section	0,25 mm <sup>2</sup>
Conductor diameter including isolation	1,17 mm ± 0,02 mm
Cable outer diameter	4,4 mm ± 0,15mm

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260053EN Version: 05	Page 1 of 3
---	---------------------------------------	-------------



22260053	<b>DATA SHEET</b>	
Valid from: 29.11.2023	<b>AB-C3-M8MA-(L*)PUR</b>	

Insulation color	brown, blue, black
Sheath color	grey-black, RAL 7021
Number of bending cycles	10.000.000
Bending radius	44 mm
Traveling distance	10 m
Traveling speed	3 m/s
Acceleration	10 m/s <sup>2</sup>
Cable weight	18 kg/km
Outer coating, material	PUR
Wire insulation, material	PP
Insulation resistance	≥ 100 GΩ*km (at 20 °C)
Flame resistance	acc. to UL 758 / 1581 FT2 DIN EN 60332-2-2 (20 s)
Halogen-free	acc. to DIN VDE 0472 Part 815
Oil resistance	acc. to DIN EN 60811-2-1
Other resistances	resistant to hydrolysis and microbes good resistant to acids, lyes and solvents limited UV resistance acc. to DIN EN ISO 4892-2-A


### Standards/Approvals

Product standard, M8 connector	IEC 61076-2-104
UL-listed, E-File	E249137


### Technical drawing

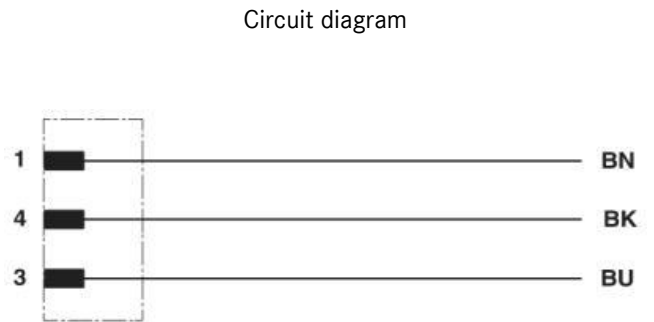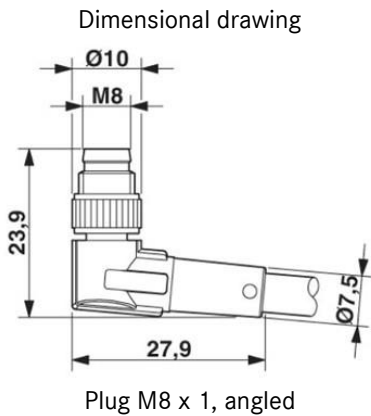


Pin assignment from M8-plug



Pin assignment M8-plug, 3 pol, A-coding



Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260053EN Version: 05	Page 2 of 3
---	---------------------------------------	-------------

22260053	<b>DATA SHEET</b>	
Valid from: 29.11.2023	<b>AB-C3-M8MA-(L*)PUR</b>	

**Application range**

For increased mechanical load and rough operating conditions

**Note**

Photographs are not true to scale and do not represent detailed images of the respective products

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260053EN Version: 05	Page 3 of 3
---	---------------------------------------	-------------