

Technical data sheet

Insulated air-termination rod for inner-routed isCon® conductor

Item number: 5408860



- For routing OBO isCon® conductors in pipes
- For installation on the building structure with isFang support
- Suitable for wind loads according to Eurocode 1: DIN EN 1991-1-4
- Tested according to VDE V 0185-561-8 (IEC TS 62561-8)
- Aluminium standpipe and air-termination tip
- Centre section made of fibre-glass reinforced plastic (GRP)



GFK Fibre-glass-reinforced plastic

Master data

Item number	5408860
Type	isFang IN L10
Description 1	Insulated interception rod
Description 2	for isCon conductor, internal
Manufacturer	OBO
Dimension	10000mm
Material	Fibre-glass-reinforced plastic
Smallest sales unit	1
Unit of quantity	Piece
Weight	1540.741 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	142,6986 kg CO2e / 1 Piece


Technical data sheet

Insulated air-termination rod for inner-routed isCon® conductor

Item number: 5408860



Dimensions

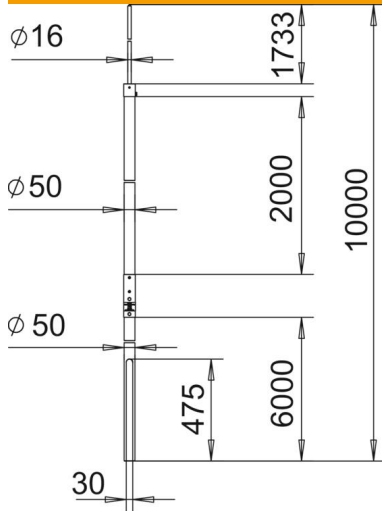

Length	10,000 mm
Dimension A	6,000 mm
Dimension B	2,000 mm
Dimension d min.	50 mm
Dimension H	1,733 mm
Dimension L	10,000 mm

Technical data

Connection	Round conductor
Version for	Air-termination rod
High voltage-resistant, insulated version	yes