


article#	253722-sr5
article description	3-way connector Taurus2 solid rubber hinged lid nat 5p IP54 red
description long	3-way connector Taurus2 solid rubber with hinged lid color housing/terminal-cover: black/red contact carrier: TPE ready wired on 5-pole terminal block (PH1) earthing system: Austrian/German (type F - with earth lug) contacts: nickel plated 250V~ / 16A / 2P+E internal strain relief with cable clamp and bend protection sleeve for serve conditions protection rating: IP54
GTIN (EAN)	9003399619625
country of origin	AT
customs number	85366990
net weight	0.375 kg
packaging quantity	5
minimum order quantity	5

ETIM 10.0	EC001327
Model	Coupler with protective contact CEE 7/3 (type F)
Material	Rubber
Material quality	Solid rubber
Degree of protection (IP)	IP54
Insert direction	Straight
Connection system	Screwed terminal
Colour	Red
Number of poles	3
Nominal voltage	250 V
Nominal current	16 A
For heavy conditions according to VDE	True

K (cable Ø)	6-13 mm
wire flexible	1-2,5 mm ²
contact screws	50 Ncm
housing screws	160 Ncm
strain relief	80 Ncm
dismantling length	30 mm
stripping length	7 mm
ambient temperature	-25 – 40 °C

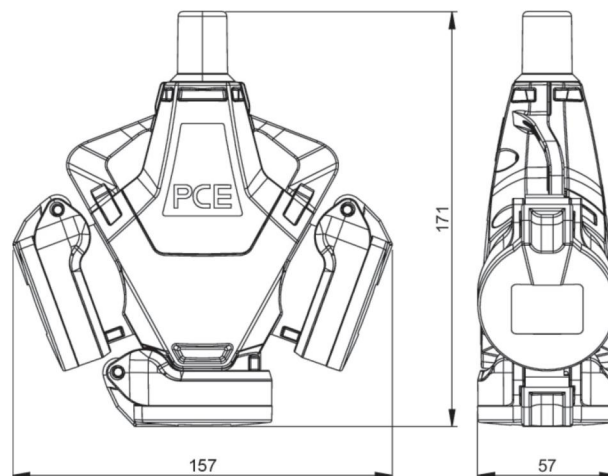

<https://www.pcelectric.at/shop/en/?func=detail&artnr=253722-sr5>