# MUNDIAL

## INDUSTRIAL PLUGS AND SOCKETS

Description: IP44 WALL PLUG 2P+E 220V 16A 6H

Reference:
**02321**

## Characteristics:

| | |
|---|---|
| **Product type:** | Low voltage wall socket |
| **Current:** | 16A |
| **Poles:** | 2P+E |
| **Voltage:** | 200…250V |
| **Frecuency(Hz):** | 50/60Hz |
| **Time code:** | 6h |
| **Colour:** | Blue |
| **Weight (kg):** | 0,232 |
| **Dimensions:** | 103x87x112 |
| **Materials:** | Halogen-free plastic materials. Plastic parts: polyamide 6. Contacts: copper-zinc alloy |
| **Packaging units:** | 6 |

## Technical data:

| | |
|---|---|
| **Degree of protection:** | IP44 |
| **Degree of protection remarks:** | |
| **Resistance to impact:** | IK08 |
| **Glow wire resistance:** | 960 ºC |
| **Ball pressure test:** | 125 ºC |
| **Ambient temperature range:** | -25 ºC / +40 ºC |

## Certifications and norms:

| | |
|---|---|
| **Directive:** | 2014/35/EU |
| **Standards:** | IEC 60309-1-2 |
| **Certificates:** | CE |

## Codes:


| | |
|---|---|
| **EAN:** | 8431044023212 |
| **Customs tariff number:** | 85.36.69.90 |
| **ETIM 8.0:** | EC001321 |

# MUNDIAL

## INDUSTRIAL PLUGS AND SOCKETS

Description: IP44 WALL PLUG 2P+E 220V 16A 6H

**Reference:** 02321

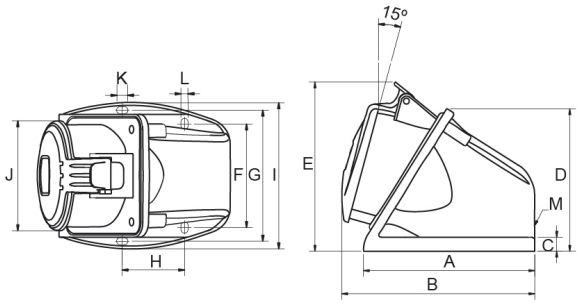




**Detailed drawing:**

https://www.ide.es/docs/planos/pdf/02321.pdf

https://www.ide.es/docs/planos/dxf/02321.dxf

https://www.ide.es/docs/planos/stp/02321.stp

## Dimensions:

| Current | Poles | Dimensions | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | A | B | C | D | E | F | G | H | I | J | K | L | M |
| 16 A | 2P+E | 100 | 109 | 10 | 88 | 98 | 53.6 | 76.6 | 40 | 87 | 55.5 | 8 | 5 | M25x1.5 |
| | 3P+E | 100 | 109 | 10 | 88 | 103 | 53.6 | 76.6 | 40 | 87 | 61.8 | 8 | 5 | M25x1.5 |
| | 3P+N+E | 118 | 127 | 10 | 99 | 117 | 71.6 | 90.6 | 43 | 101 | 70 | 8 | 5 | M25x1.5 |
| 32A | 2P+E | 118 | 132 | 10 | 99 | 117 | 71.6 | 90.6 | 43 | 101 | 70 | 8 | 5 | M25x1.5 |
| | 3P+E | 118 | 132 | 10 | 99 | 117 | 71.6 | 90.6 | 43 | 101 | 70 | 8 | 5 | M25x1.5 |
| | 3P+N+E | 118 | 132 | 10 | 99 | 120 | 71.6 | 90.6 | 43 | 101 | 76.7 | 8 | 5 | M25x1.5 |

## Sustainability:

RoHS - REACH

## Product end of life stage:

Product concerned in the WEEE regulations.

## Supply:

Supplied in a single box per packaging multiple