MUNDIAL

INDUSTRIAL PLUGS AND SOCKETS

Description: IP44 WANDER PLUG 3P+N+E 380V 32A 6H

Reference:
03106

Characteristics:

Product type:	Low voltage wander plug
Current:	32A
Poles:	3P+N+E
Voltage:	380…415V
Frecuency(Hz):	50/60Hz
Time code:	6h
Colour:	Red
Weight (kg):	0,241
Dimensions:	
Materials:	Halogen-free plastic materials. Plastic parts: polyamide 6. Contacts: copper-zinc alloy
Packaging units:	10

Technical data:

Degree of protection:	IP44
Degree of protection remarks:	
Resistance to impact:	IK08
Glow wire resistance:	960 ºC
Ball pressure test:	125 ºC
Ambient temperature range:	-25 ºC / +40 ºC

Certifications and norms:

Directive:	2014/35/EU
Standards:	IEC 60309-1-2
Certificates:	CE

Codes:


EAN:	8431044031064
Customs tariff number:	85.36.69.90
ETIM 8.0:	EC000140

MUNDIAL

INDUSTRIAL PLUGS AND SOCKETS

Description: IP44 WANDER PLUG 3P+N+E 380V 32A 6H

Reference: 03106

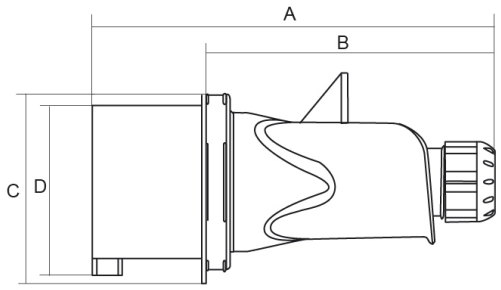



Detailed drawing:

https://www.ide.es/docs/planos/pdf/03106.pdf

https://www.ide.es/docs/planos/dxf/03106.dxf

https://www.ide.es/docs/planos/stp/03106.stp

Dimensions:

I	Poles	Dimensions			
		A	B	C	D
16 A	2P+E	134	96	55	54
	3P+E	144	106	61	58
	3P+N+E	149	111	69	66
32A	2P+E	156	111	72	66
	3P+E	156	111	72	66
	3P+N+E	163	118	78	72

Sustainability:

RoHS - REACH

Product end of life stage:

Product concerned in the WEEE regulations.

Supply:

Supplied in a single box per packaging multiple