STAR KNOCK-OUT

IP65 BOXES FOR INDUSTRIAL SOCKETS

Description: IP65 ADDITIONAL KNOCKOUT MODULE

Reference:
PCSNPLUS

Characteristics:

Product type:	IP65 Boxes for industrial sockets with knock-out covers
Exterior dimensions (Height x Width x Depth):	436x142x124 mm
Dimensions of the flush-fit gap (HxWxD):	-
Number of modules:	-
Installation:	Surface
Color:	RAL 7035
Window:	
Weight (kg):	1,06
Cable entry:	Top: 2xM20 - 1xM40. Bottom: 2xM20 - 1xM40. Oblong rear: 2xOB25x25
Components:	3 Plain covers - 1 16A/Schuko IP67 cover - 1 IP44/IP54 Schuko cover
Materials:	Halogen-free plastic materials. ABS. Recommended for outdoor use: UV protection under ISO standard 4892-2, Method A: 500h.
Lid-window-door material:	

Technical data:

Degree of protection:	IP65
Resistance to impact:	IK08
Glow wire resistance:	650 ºC
Ball pressure test:	70 ºC
Ambient temperature range:	-25 ºC / +60 ºC
Maximum material temperature:	
Maximum operating voltage:	1000 V AC / 1500 V DC
Rated current:	
Double insulation:	Class II

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208, IEC 61439-1
Certificates:	

CE

Codes:


EAN:	8431044243641
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC000379

STAR KNOCK-OUT

IP65 BOXES FOR INDUSTRIAL SOCKETS

Description: IP65 ADDITIONAL KNOCKOUT MODULE

Reference: PCSNPLUS

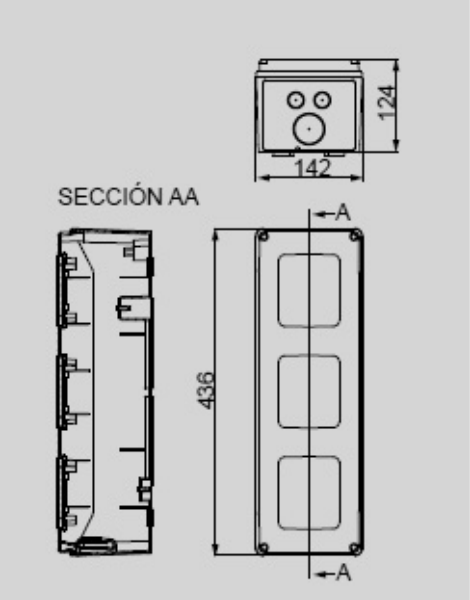



Detailed drawing:

- https://www.ide.es/downloads/planos/pdf/PCSNPLUS.pdf
- https://www.ide.es/downloads/planos/dxf/PCSNPLUS.dxf
- https://www.ide.es/downloads/planos/stp/PCSNPLUS.stp

Exterior dimensions (Height x Width x Depth):

436x142x124 mm

Dimensions of the flush-fit gap (Height x Width x Depth):

-

Sustainability:

RoHS - REACH

Product end of life:

It does not require specific recycling operations.

Supply:

Supplied in individual cardboard packaging. When several items are sent together, they are bundled together with transparent film.

Packaging units: 6

Recommended applications:

Industrial and outdoor environments. Industrial sites, docks, swimming pools, garages, anywhere that requires a high degree of protection against dust, splashes and impacts.